

8A4DLTP-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	210Ah
Capacity at C/20	198Ah
Weight	133.5 lbs. (61 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-40°F (-40°C) - 140°F (60°C)



Vent	Self-sealing
Terminal	T (T975)



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology




DIMENSIONS

Inches (mm)

Length	20.73 (527 mm) <i>Including handles</i>
Width	8.44 (214 mm)
Height	10.82 (275 mm) <i>Including terminals</i>

AGM Cycle Life vs. Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

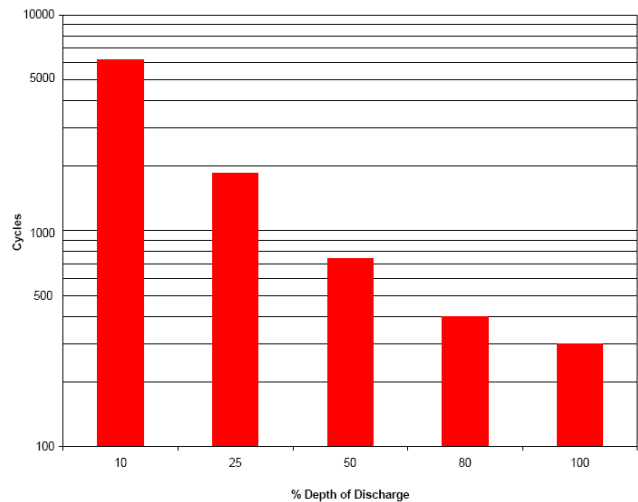

Solar Electric Supply, Inc.

Toll Free: 877-297-0014 • www.solarelectricsupply.com



**SOLAR
ELECTRIC
SUPPLY, INC.**