


8G27-DEKA

SPECIFICATIONS

Nominal Voltage (V)	12V
Capacity at C/100	99Ah
Capacity at C/20	88Ah
Weight	62 lbs. (28 kg)
Plate Alloy	Lead Calcium
Posts	Forged Terminals & Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)



Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	B (T876)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

Solar Electric Supply, Inc.
(877) 297-0014 - (831) 462-8243
www.solarelectricsupply.com

Valve-Regulated, Gelled-Electrolyte Battery




DIMENSIONS

Inches (mm)

Length	12.83 (326 mm)
Width	6.56 (167 mm)
Height	9.30 (236 mm) <i>Including Terminal</i>

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity**

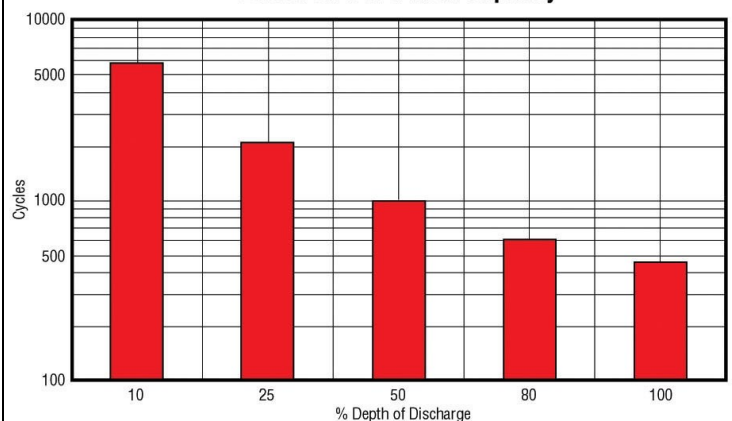

**SOLAR
ELECTRIC
SUPPLY, INC.**