

REC TWINPEAK BLK SERIES

PREMIUM SOLAR PANELS WITH SUPERIOR PERFORMANCE

REC TwinPeak BLK Series solar panels feature an innovative design with high panel efficiency and power output, enabling customers to get the most out of the space used for the installation.

Combined with industry-leading product quality and the reliability of a strong and established European brand, REC TwinPeak BLK panels are ideal for residential and commercial rooftops worldwide.



**MORE POWER
OUTPUT PER M²**



**HIGHER
ENERGY YIELD**




**100%
PID FREE**



**REDUCES BALANCE OF
SYSTEM COSTS**

REC TWINPEAK BLK SERIES

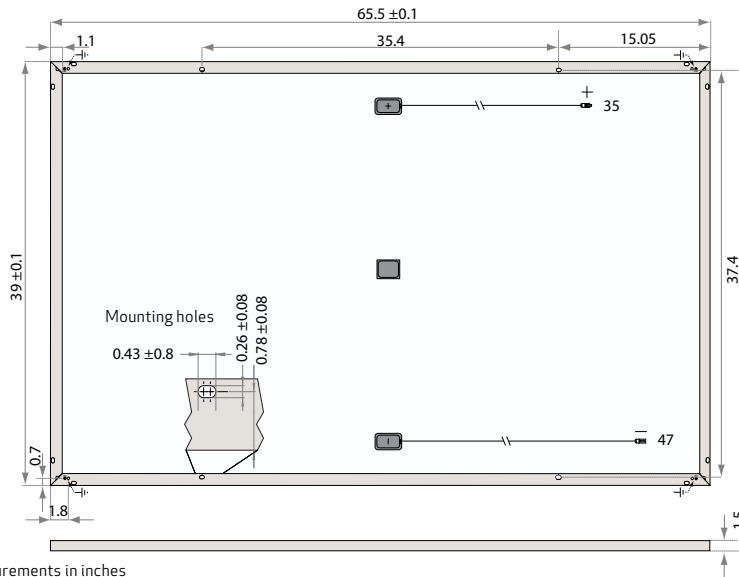

All measurements in inches

| ELECTRICAL DATA @ STC | REC265TP | REC270TP | REC275TP | REC280TP |
|---------------------------------------|----------|----------|----------|----------|
| Nominal Power - P_{MPP} (Wp) | 265 | 270 | 275 | 280 |
| Watt Class Sorting - (W) | 0/+5 | 0/+5 | 0/+5 | 0/+5 |
| Nominal Power Voltage - V_{MPP} (V) | 31.1 | 31.2 | 31.4 | 31.9 |
| Nominal Power Current - I_{MPP} (A) | 8.53 | 8.66 | 8.76 | 8.78 |
| Open Circuit Voltage - V_{OC} (V) | 38.3 | 38.6 | 38.8 | 39.2 |
| Short Circuit Current - I_{SC} (A) | 9.21 | 9.29 | 9.40 | 9.44 |
| Panel Efficiency (%) | 16.1 | 16.4 | 16.7 | 17.0 |

Analysed data demonstrates that 99.7% of panels produced have current and voltage tolerance of $\pm 3\%$ from nominal values. Values at standard test conditions STC (airmass AM 1.5, irradiance 1000 W/m², cell temperature 25°C). At low irradiance of 200 W/m² (AM 1.5 and cell temperature 25°C) at least 94% of the STC panel efficiency will be achieved.

| ELECTRICAL DATA @ NOCT | REC265TP | REC270TP | REC275TP | REC280TP |
|---------------------------------------|----------|----------|----------|----------|
| Nominal Power - P_{MPP} (Wp) | 195 | 198 | 202 | 205 |
| Nominal Power Voltage - V_{MPP} (V) | 28.75 | 28.85 | 29.03 | 29.49 |
| Nominal Power Current - I_{MPP} (A) | 6.77 | 6.87 | 6.95 | 6.97 |
| Open Circuit Voltage - V_{OC} (V) | 35.25 | 35.53 | 35.71 | 36.08 |
| Short Circuit Current - I_{SC} (A) | 7.32 | 7.38 | 7.47 | 7.50 |

Nominal operating cell temperature NOCT (800 W/m², AM 1.5, windspeed 1 m/s, ambient temperature 20°C).

CERTIFICATION



UL 1703, - Fire classification Type 2
IEC 61215, IEC 61730;
IEC 61701 (Salt Mist - severity levels 1&6)

WARRANTY

10 year product warranty.
25 year linear power output warranty
(max. degradation in performance of 0.7% p.a.).

17.0% EFFICIENCY
10 YEAR PRODUCT WARRANTY
25 YEAR LINEAR POWER OUTPUT WARRANTY
DUTY★FREE US IMPORT DUTY FREE

TEMPERATURE RATINGS

| | |
|---|----------------------------------|
| Nominal Operating Cell Temperature (NOCT) | 44.6°C ($\pm 2^\circ\text{C}$) |
| Temperature Coefficient of P_{MPP} | -0.39 %/°C |
| Temperature Coefficient of V_{OC} | -0.31 %/°C |
| Temperature Coefficient of I_{SC} | 0.045 %/°C |

GENERAL DATA

| | |
|---------------|---|
| Cell type: | 120 REC HC multi-crystalline 6 strings of 20 cells (6" x 3") |
| Glass: | 1/8" mm solar glass with anti-reflective surface treatment |
| Back sheet: | Double layer highly resistant polyester (white) |
| Frame: | Anodized aluminum (black) |
| Junction box: | 3-part with bypass diodes IP67 rated 4 mm ² solar cable, 35" + 47" |
| Connectors: | Multi-Contact MC4 (4 mm ²) |
| Origin: | Made in Singapore |

MAXIMUM RATINGS

| | |
|--------------------------|---|
| Operational Temperature: | -40 ... +85°C |
| Maximum System Voltage: | 1000 V |
| Design Load*: | 75.2 lbs/ft ² (3600 Pa) 33.4 lbs/ft ² (1600 Pa) *Refer to installation manual |
| Max Series Fuse Rating: | 15 A |
| Max Reverse Current: | 15 A |

MECHANICAL DATA

| | |
|-------------|------------------------|
| Dimensions: | 65 1/2 x 39 x 1 1/2 in |
| Area: | 17 3/4 ft ² |
| Weight: | 39 1/2 lbs |

Note! All given specifications are subject to change without notice at any time.

REC is the largest European brand of solar panels, with more than 15 million high-quality panels produced at the end of 2014. With integrated manufacturing from polysilicon to wafers, cells, panels and turnkey solar solutions, REC strives to help meet the world's growing energy needs. In partnership with a sales channel of distributors, installers, and EPCs, REC panels are installed globally. Founded in 1996, REC is a Bluestar Elkem company with headquarters in Norway and operational headquarters in Singapore. REC's 1,800 employees worldwide generated revenues of USD 680 million in 2014.



www.recgroup.com